


PM STX Duplex 2507.

Pushing Boundaries. Engineering Possibilities.

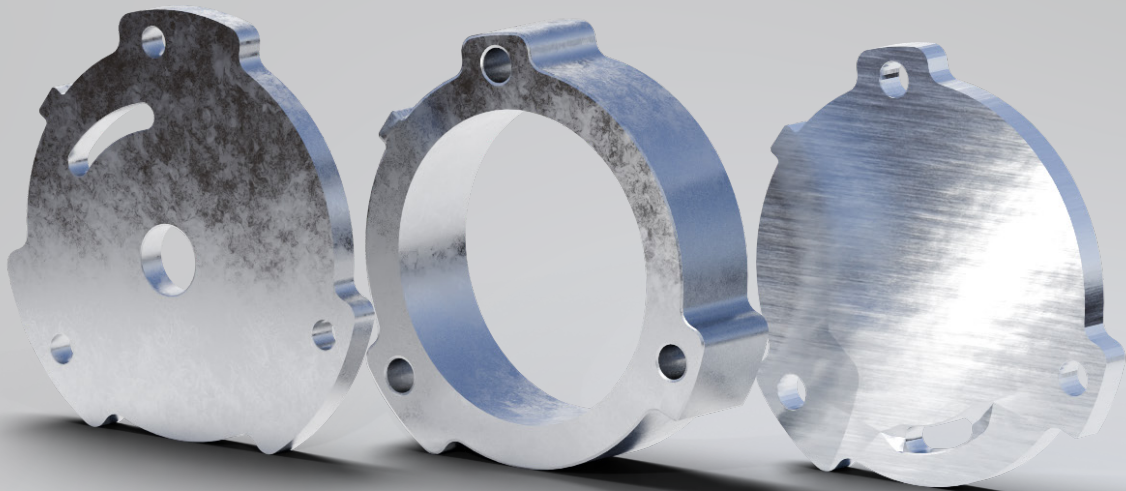

PM STX Duplex 2507.

Duplex 2507 has been known for years and has solved many jobs within offshore, chemical industry and other industries where demands for high corrosion resistance combined with high mechanical properties are needed.

At Sintex we have developed STX Duplex 2507 based on traditional powder metallurgic compaction process added up with our experts knowhow on optimization of corrosion resistance resulting in a new product that enables the delivery of STX Duplex 2507 parts in complex shapes and in high numbers.

This preliminary datasheet covers the first findings and we expect that further optimization is possible in collaboration with costumers and partners in the market.

Chemical Composition


Cr	Ni	Mo	N	Fe
25	7	3,9	0,32	Balance

Table 1: Chemical composition.



Figure 1: Typical parts that are made with the traditional PM process showing the degree of freedom that exist with the PM process now open for STX Duplex 2507 alloys.

In salt spray chamber the alloy is unaffected, and even in 3% FeCl₃ solution we cannot measure any weight loss. Therefore we have changed our corrosion test into a traditional CPT rising the temperature until we have breakdown. Our corrosion PREN-number is 43.

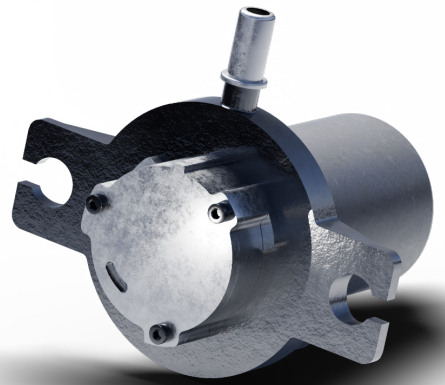

Critical Pitting Temperature (CPT) 24 h test

6% FeCl ₃ Corrosion resistance	Weightloss	Observation
25 °C	0 g/m ²	No visual
30 °C	0 g/m ²	No visual
40 °C	~2 g/m ²	No visual
50 °C		Ongoing

Figure 2: Preliminary results from CPT test.

Preliminary mechanical properties from ISO 2740 Tensile bars

Mechanical properties	Low	Medium
Tensile Strength	324 MPa	350 MPa
UTS	409 MPa	442 MPa
Elongation	4,3%	4,8%

Table 3: Mechanical properties measured on standard compaction and sintering conditions. There is a potential for improving these on several parameters.

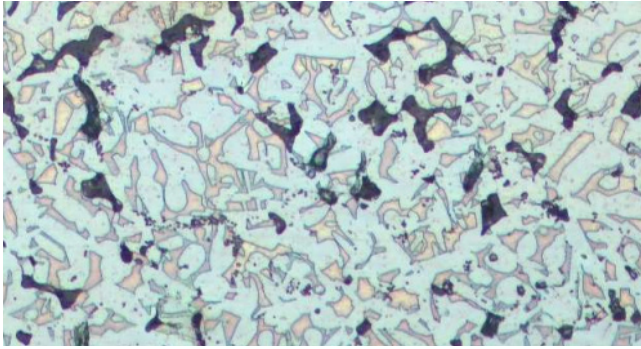


Figure 3: Typical microstructure of a Duplex 2507 material made via PM process route.


Results

It is expected that the new PM Duplex 2507 material can be used successfully in new application areas like offshore, food industry and chemical industry where demands for high corrosion resistance combined with solid mechanical properties are known.

Further development will be carried out in collaboration with application partners optimizing the needed properties. Please contact us for more information or potential collaboration on your application.

Please contact us for more information.

Version 2025-09-15

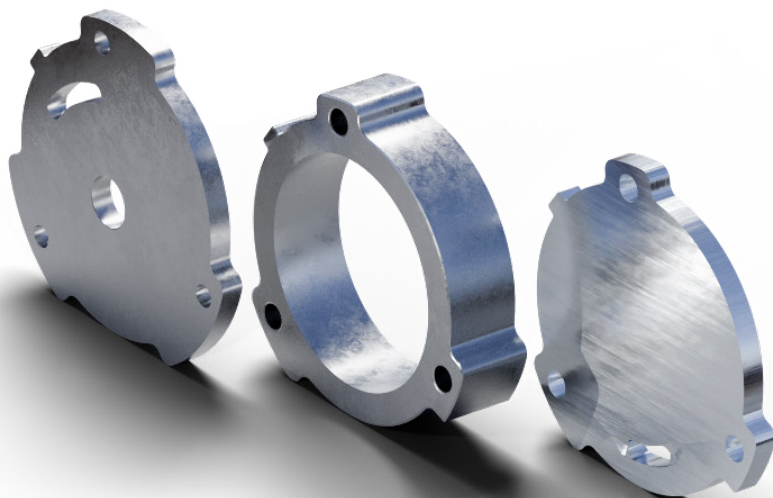

E-mail: info@sintex.com

Tel.: (+45) 9657 4300

www.sintex.com



Unleash
the power
within.

